

What is your trouble in using Network IP Camera?

- Public Network IP address?
- Dynamic DNS?
- Port mapping?
- Virtual server?
- NAT configuration?
- uPnP support in router?

How to avoid these troubles?

- Use ID and Password
- Use Assistant Connection Address like email address

Need any additional service charge?

- No !



EK200 SERIES IP VIDEO SERVER

<http://www.e-kam.com>

DESCRIPTION

EK200 Series IP Video Server is designed specifically for high-quality and affordable network-based monitoring. It combines high performance with value-added features such as built-in connection assistant server, web server, embedded Linux operate system, activity detection and pre-/post-alarm recording. It also supports advanced MPEG4-ASP and MPEG4-SP compression formats for great flexibility when configuring your network environment or choosing an application. For further efficiency and effectiveness in operating your IP surveillance system, this product offers a simultaneous access capability, a multicasting feature, and a choice of network security functions such as IP filtering and password protection. If you want an affordable, feature-rich solution for your IP-based security and surveillance applications, EK200 Series Video Server is a perfect choice.

Thank you for reading this datasheet, if you need any online technical support, please feel free to contact us.

TECHNICAL SUPPORT CENTER
E-KAM TELECOMMUNICATIONS

e-KAM

KEY FEATURES:

- Support self-building DDNS Server based on NMCP Protocol, enables you to access accurately and easily over WAN, completely settled the troubles of Dynamic IP Address.
- Support working through NAT devices, allows you to access easily with an assistant connecting address without any Router's configurations.
- Support being identified automatically by management software in local area network.
- Support Duo-Rate-stream Transmit function, to save the system and network resources.
- Support adaptive rate control function.
- Support being decoded over WAN by using an EK500 Series Decoder, the decoded image can be output to a TV set or monitor in turn. The Dwell time of an image can be adjusted.
- Built-in web server function, allowed to be accessed expediently via Internet Explorer.
- Built-in embedded Linux operation system, support downloading the software, upgrading and setting the device.
- Support fault detection, recovery and automatic connection.
- Multi-protocols supported: TCP / UDP / HTTP / PPPoE / DHCP / DNS / AGMP / TFTP.
- Variety of power options: DC 12 V, or PoE (Power over Ethernet).
- Equipped with Sony progressive scan CCDs and advanced DSP technology – provides clear and detailed images while maintaining high sensitivity.
- Choice of compression formats: advanced MPEG4-ASP. MPEG4-SP.
- Limits data bit rate while maintaining high-quality images, Ideal when network bandwidth is limited, Useful for calculating the required bandwidth during installation
- Alarm function: with activity detection and pre-/post-alarm recording modes.
- Bi-directional audio function.

SPECIFICATION

IMAGE

Compression Format : MPEG4-SP / MPEG-4-ASP

Maximum Frame Rate: MPEG4 : 30 fps (NTSC), 25 fps(PAL)

Digital Image Resolution: D1(PAL: 720 x 576 \ NTSC: 720 x 480), CIF(352 x 288)

Image Encoded Bandwidth: 64kbps to 4Mbps

Bit rate adjustment: Variable Bit Rate (VBR) or Constant Bit Rate (CBR)

Image Parameter Adjustment: Quality, Contrast, Brightness, Hue and Saturation

Caption Overlay: Support date and time texts overlay on image and the positions of the texts can be adjusted.

AUDIO

Audio Compression: ADPCM

Audio Encoder Bandwidth: 32kbps

Built-in Mini Microphone

SPECIFICATION

INTERFACE

Ethernet: 10Base-T/100Base-TX (RJ-45)

I/O port: 5 GPIO connectors for Input or Output

Communication Connector: 1 RS-232 selectable

External Microphone Input: Mini-jack (monaural, 2.2 K2.5 V plug-in power)

Audio line Output: Mini-jack (monaural), max output level: 1 Vrms

GENERAL

Mass: approx. 300G (1 lb 2 oz)

Dimensions: 138*95*27mm

Power Requirements: DC 12 V / PoE

Power Consumption: 3.5 W.

Operating Temperature: -10 to 60 degree

Storage Temperature: -10 to 60 degree

Relative Humidity: 10% to 90%

SYSTEM REQUIREMENTS

Operating System: Microsoft Windows 2000/XP


Processor: CPU: Intel Pentium IV 1.5 GHz or higher

Memory: RAM: 256 MB or more

Web Browser: Microsoft Internet Explorer Ver.5.5 or higher

E-KAM SURVEILLANCE SYSTEM ORGANIZATION

E-KAM

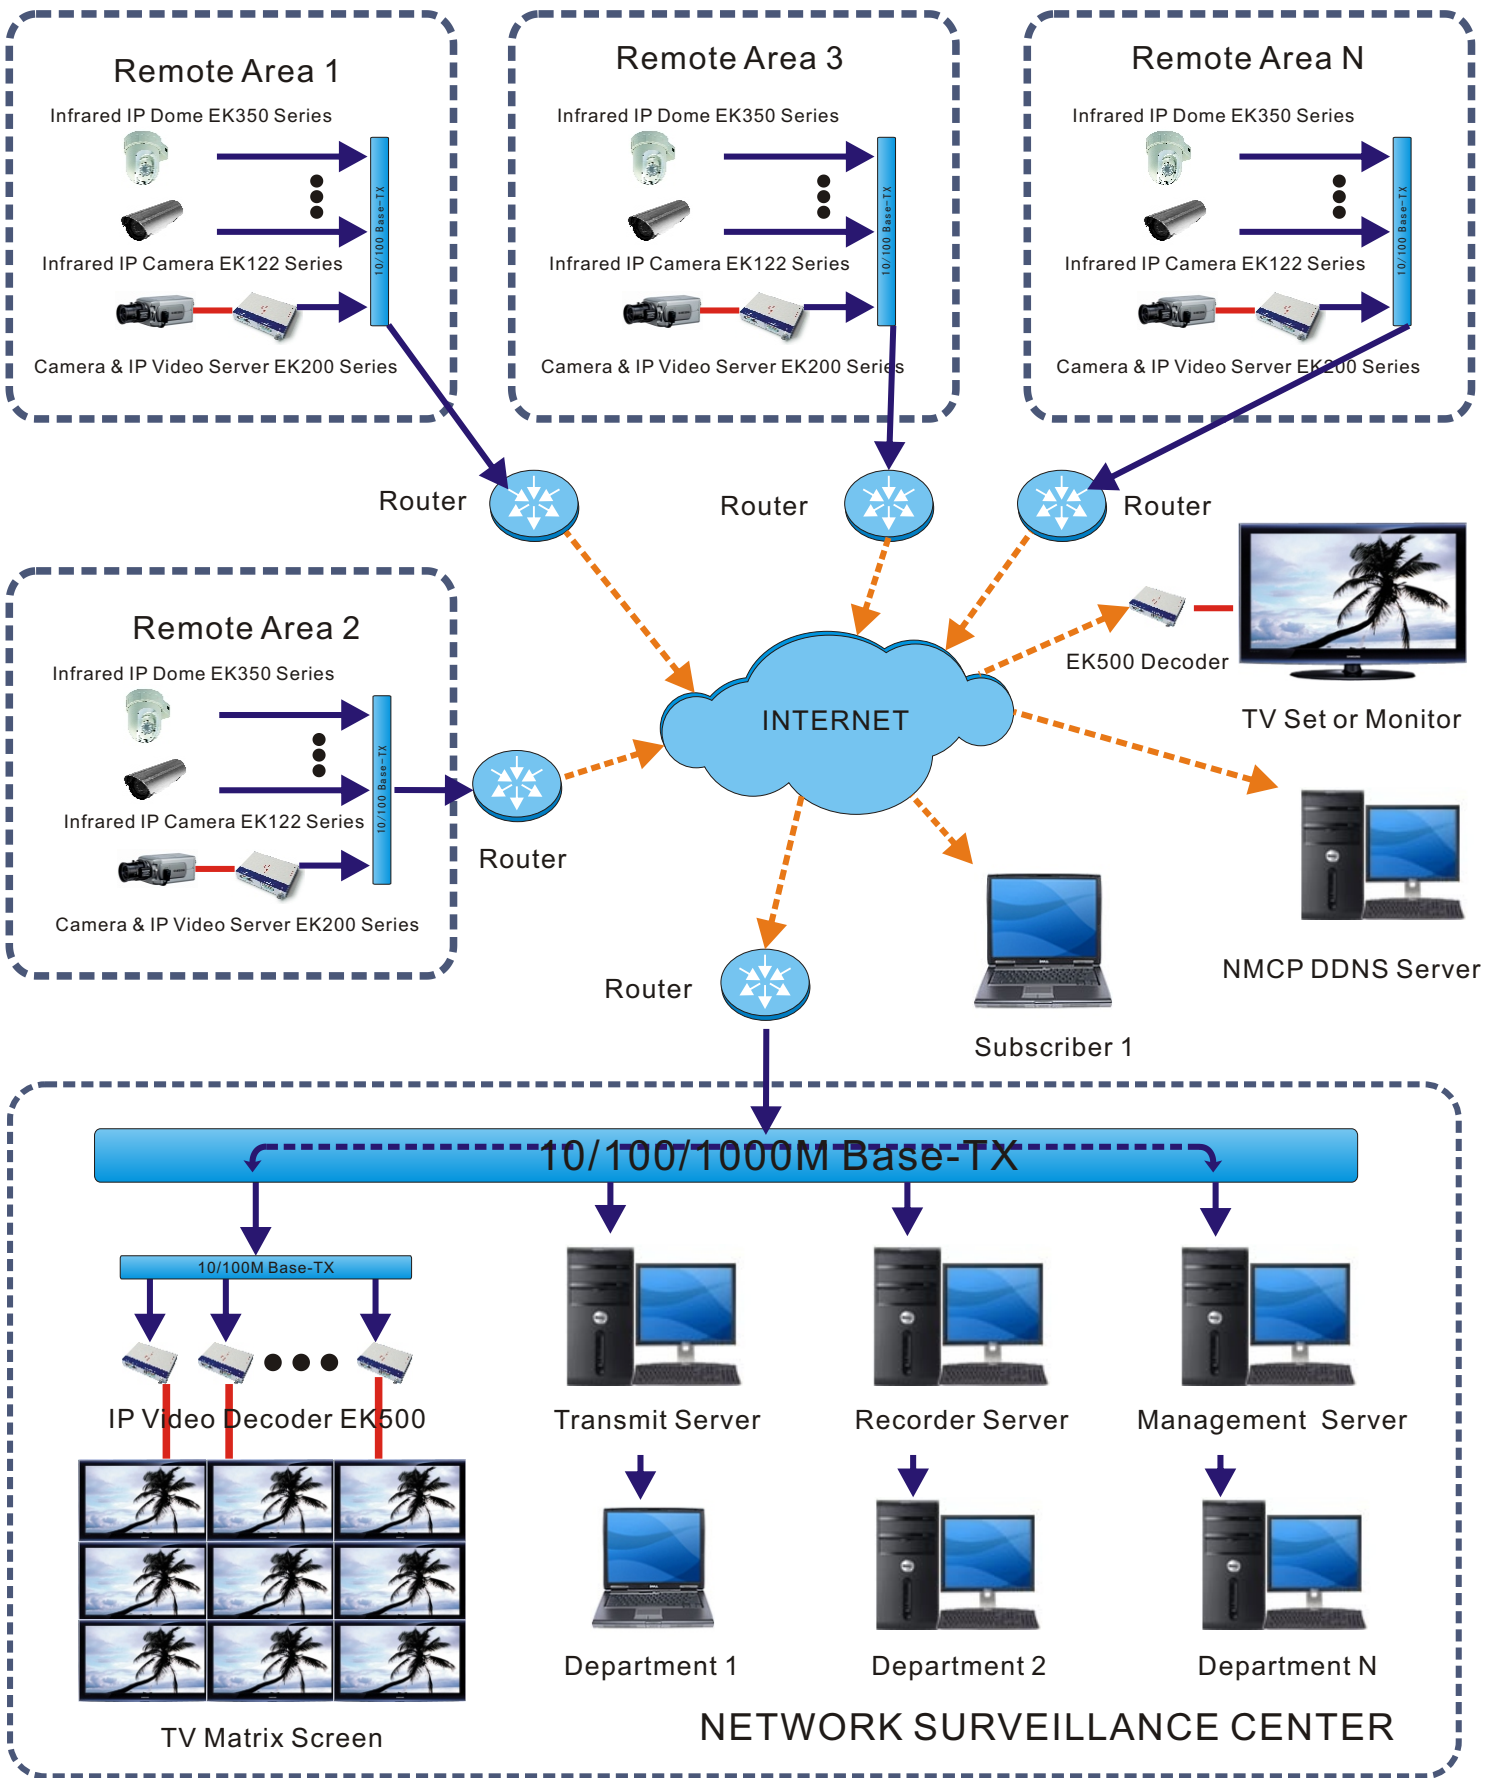

LAN
LAN Switch



Router

CAT 5 Network Cable

75-5 Coaxial Cable

Internet Connect

e-KAM

Make Security Easiest

EKDS081016EN



FULL CONTACT INFORMATION:

Shenzhen E-KAM Telecommunications Equipment Co., Ltd.

Address: 4F, Block A, Building R3, Shenzhen High-tech Industrial Park,
Nanshan District, Shenzhen, P.R.China

URL: <http://www.e-kam.com> (Global website)

For Live Demo: <http://219.133.170.101> (User name: admin Password: admin)

Email: risun@e-camera.cn MSN: focomm@msn.com (Support on line)

Skype: focommsvr ICQ: 496284686

Tel: +86-755-26551723

Fax: +86-755-26549057